
Lightweight Portable Auto / 4 Wire Control Telephone

The ideal tool for railway trackside communication.



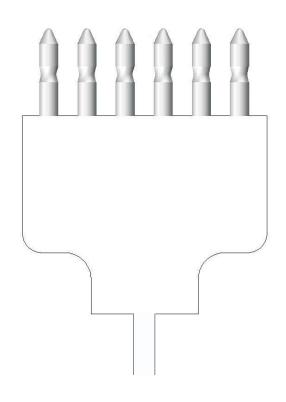

Telereach,

www.telereach.in

#1765, 7th Cross, 18th Main, J P Nagar 2nd Phase Bengaluru 560078, India +91 80 26 586 222 80 26 589 222 94 80 175 222 94 80 176 222



LPACT-1



Two complete telephones in one portable package.

Ergonomic shape and weight distribution.
Custom-molded robust plastic housing.
Non-topple flat contour for stable resting on desk-top.
Drizzle-resistant snug fitting of cover and base.
Identical dynamic transducers for receiver and transmitter.
Transducers positioned as per CCITT guideline.
Barrier mouthpiece to curb ambient noise.
Push-button mode selection.
Heavy duty anchored cord and anti-rupture grommet.
Termination by 6 Pin Plug.
Total weight with cord and 6 Pin Plug less than 600 gm.
Comfortable and durable carry pouch.

4 Wire Control Telephone

Guiding specification: IRS TC 78/2000.

Power Supply by built-in rechargeable Lithium Ion battery.

Battery charging through USB port from mobile phone charger.

Charges in 4 hours, over 100 hours of talk-time per charge.

LED for indicating Charging / Full while charging.

LED for indicating Battery Level during Off-Hook.

Lockable PTT switch for user comfort.

Connection through outer 4 pins of 6 Pin Plug.

Auto Telephone

Guiding specification: TEC/GR/CP/TEL-002/06.

Operates from central battery power drawn from line.

LED for indicating Off-Hook condition.

Complete 4x3 tactile membrane keypad as per CCITT norm.

Redial memory lasts an hour even after disconnection.

Complete speech and dialling circuitry.

Standard ringing system during On-Hook condition.

Connection through middle 2 pins of 6 Pin Plug.

Inspection by RITES may be availed if purchase value is above 5 lakh rupees.

Description and illustration may change due to improvements.